




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

## Repair and Restoration Anchors

# Torq-Lok® 510 Series Anchor

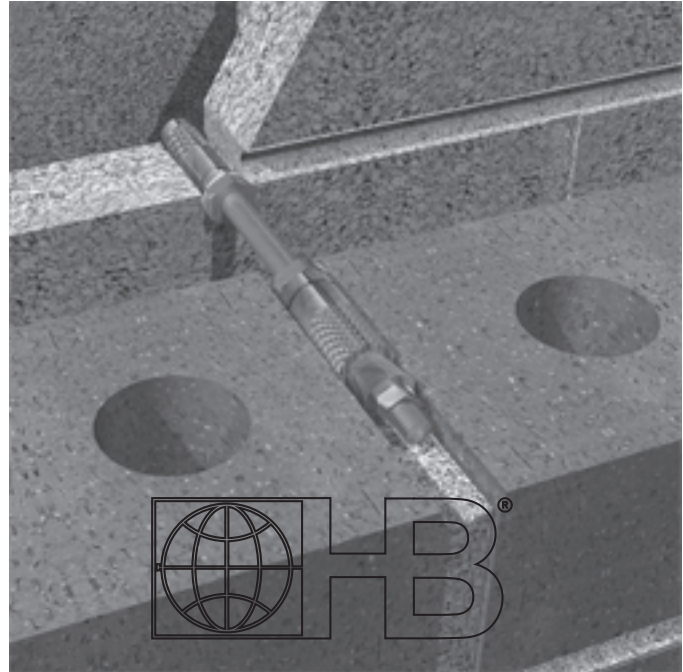

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### Torq-Lok - 510 Series

The 510 Series Anchor, for hollow backup, features 360 Brass Expanders with a Type 304 Stainless Steel shaft and 300 Stainless Steel hardware.

#### Technical Data:

Typical Torq-Lok® Shaft Properties  
*Ultimate Shaft Buckling Strength*

Shaft Length (in.)	5 ½	6 ½	9 ½	11 ½
Capacity (lb.)	1620	1425	1100	725

Hole in veneer = 1/2"

Hole in backup = 3/8"

Installation Torque:

Veneer = 50 - 100 in. lbs.

Backup = 50 - 100 in. lbs.

Based on a typical 3 5/8" veneer.

#### Shaft Length:

- 5 ½"
- 6 ½"
- 9 ½"
- 11 ½"

The 510 Series Anchor can be used with: hollow CMU, solid CMU, concrete, brick, or clay tile.

**HOHMANN & BARNARD, Inc.**  
30 Rasons Court | Hauppauge, NY 11788  
CORPORATE HEADQUARTERS  
T: 800.645.0616 F: 631.234.0683  
[www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS - MARYLAND  
NEW YORK - PENNSYLVANIA - TEXAS  
CANADA

© HOHMANN & BARNARD, INC. - 2012