


## #315 Flexible Dovetail Tie

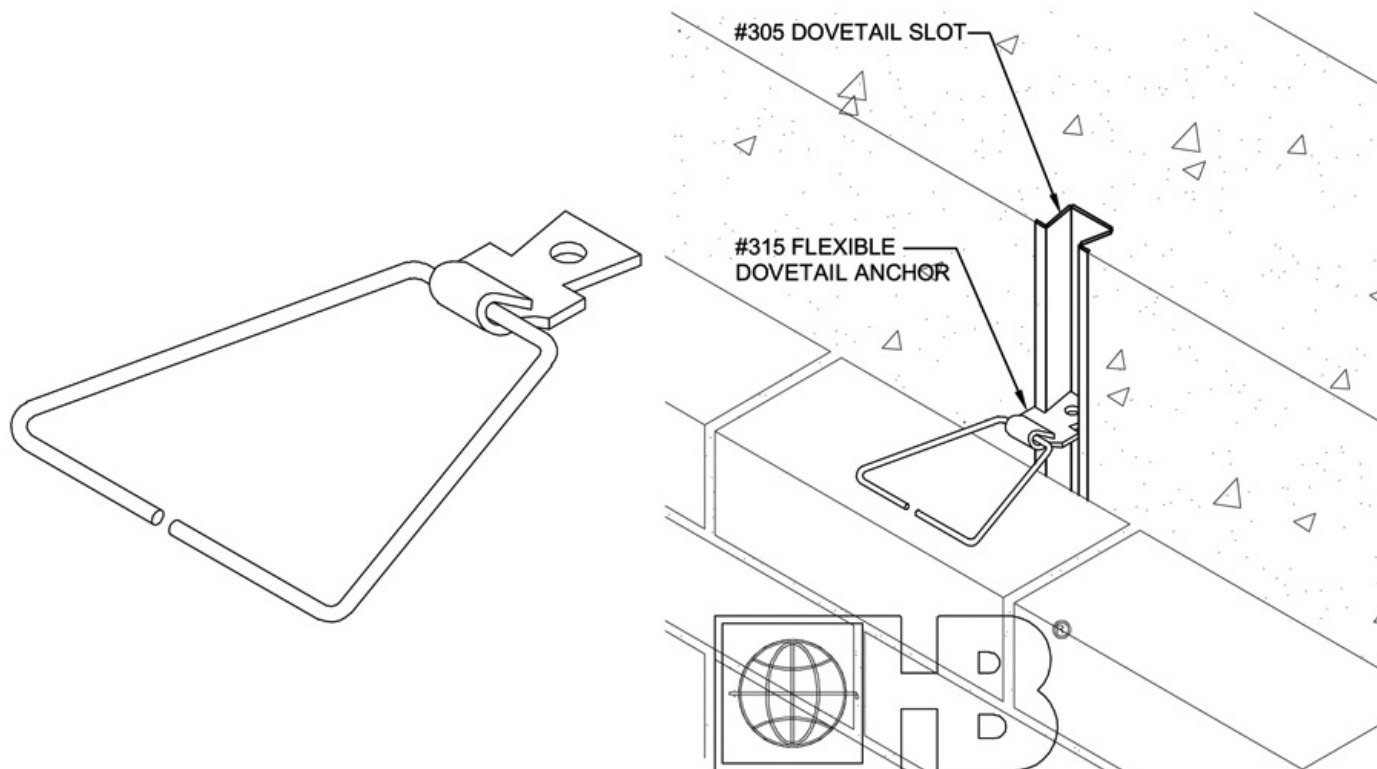

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

<p><b>WIRE (Carbon Steel):</b> Cold-drawn steel wire conforming to ASTM A 82: Tensile strength - 80,000 p.s.i. Yield Point - 70,000 p.s.i. minimum Zinc Coating: Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft) Note: Hohmann &amp; Barnard will certify to a minimum of 2.0 oz/ff</p> <p><b>WIRE (Stainless Steel):</b> ASTM A 580 - AISI Type 304. (Type 316 available on special order.)</p> <p><b>SHEET METAL (Carbon Steel):</b> ASTM A 366 Zinc Coating: ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication). Note: Hohmann &amp; Barnard will certify to a minimum of 2.0 oz/ff</p> <p><b>SHEET METAL (Stainless Steel):</b> ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order). Note: H&amp;B recommends Stainless Steel for maximum protection against corrosion.</p>	<p><b>DOVETAIL HEAD:</b> <input type="checkbox"/> 14 Gauge Standard <input type="checkbox"/> 12 Gauge Heavyweight</p> <p><b>VEE WALL TIE DIAMETER:</b> <input type="checkbox"/> 3/16"Ø Standard <input type="checkbox"/> 1/4"Ø Heavyweight</p> <p><b>VEE WALL TIE LENGTH:</b> <input type="checkbox"/> 3"   <input type="checkbox"/> 3 1/2"   <input type="checkbox"/> 4"   <input type="checkbox"/> 4 1/2"   <input type="checkbox"/> 5" <input type="checkbox"/> OTHER LENGTH _____</p> <p><b>FINISH:</b> <input type="checkbox"/> Hot Dip Galvanized <input type="checkbox"/> Stainless Steel</p>
--	--