




# Veneer Anchors X-Seal™ Anchor

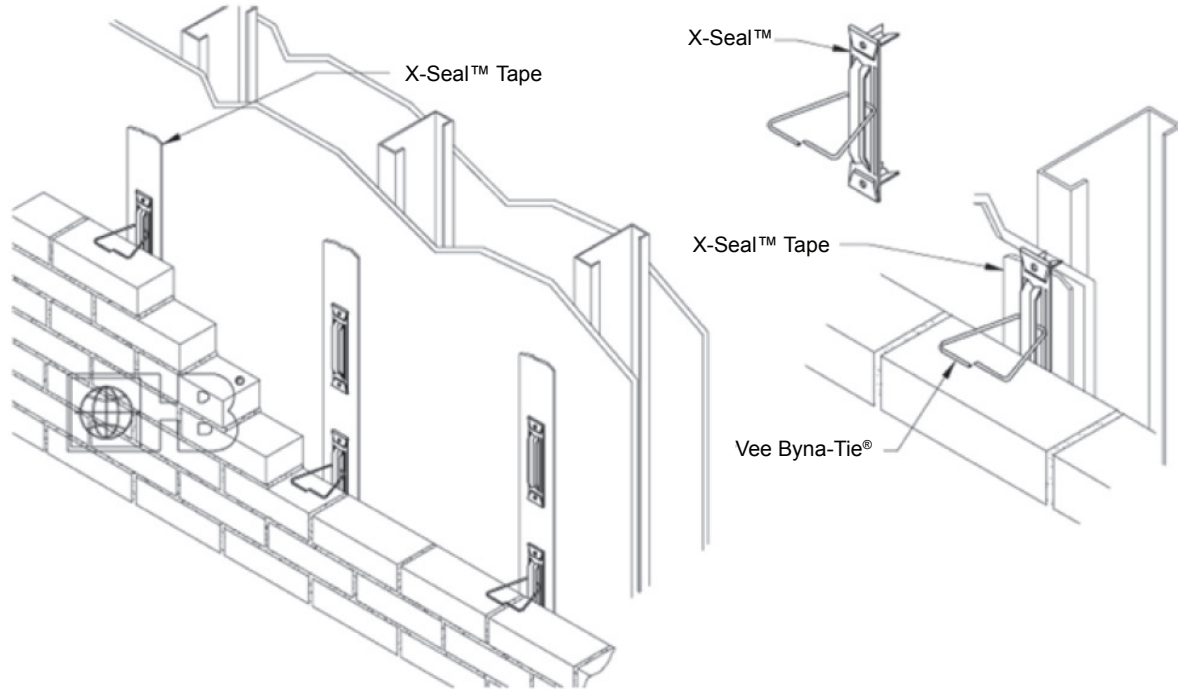

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**Description:**

The X-Seal™ Anchor is a veneer wall anchor that allows the backplate to seal sheathing from air and moisture infiltration while maintaining integrity of the vapor barrier.

**MATERIAL CONFORMANCE**

**Wire (Carbon Steel):** Prefabricated from cold-drawn steel wire conforming to **ASTM A82/A82M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum  
Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B** (1.5 oz/ft<sup>2</sup>)  
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Wire (Stainless Steel): ASTM A580/A580M** - AISI Type 304 (Type 316 available on special order)

**Sheet Metal (Carbon Steel): ASTM A1008/A1008M**

Zinc Coating:  
Hot-Dip Galvanized: **ASTM A153/A153M Class B** (1.5 oz/ft<sup>2</sup>)  
(sheet metal ties and anchors galvanized after fabrication)

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Sheet Metal (Stainless Steel): ASTM A 666, ASTM A480, ASTM A240/A240M, and ASTM A167 - AISI Type 304** (Type 316 available on special order)

**Polyethylene Foam (Optional X-Seal™ Tape)**  
**ASTM D4819, ASTM D3575, ASTM D412**

**Finish:**

- Hot-Dip Galvanized
- Stainless Steel - Type 304 (Type 316 available on special order)

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

**Leg Depth (Equal to thickness of wallboard + insulation):**

- |  |  |  |
|--|--|--|
| <input type="checkbox"/> X-Seal (1/2")   | <input type="checkbox"/> X-Seal (3/4")   | <input type="checkbox"/> X-Seal (1")     |
| <input type="checkbox"/> X-Seal (1 1/2") | <input type="checkbox"/> X-Seal (2")     | <input type="checkbox"/> X-Seal (2 1/2") |
| <input type="checkbox"/> X-Seal (3")     | <input type="checkbox"/> X-Seal (3 1/2") | <input type="checkbox"/> X-Seal (4")     |
| <input type="checkbox"/> X-Seal (4 1/2") |  |  |

**Thickness:**  14 Gauge

**Vee-Byna Tie® Diameter:**

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

**Vee-Byna Tie® Length:**

- 3"       3 1/2"       4"       4 1/2"
- 5"       Other \_\_\_\_\_

**X-Seal® Tape (Optional):** Adhesive backed 40 mil 3" x 50 ft. rolls