




HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Concrete Inserts Askew Head Bolt

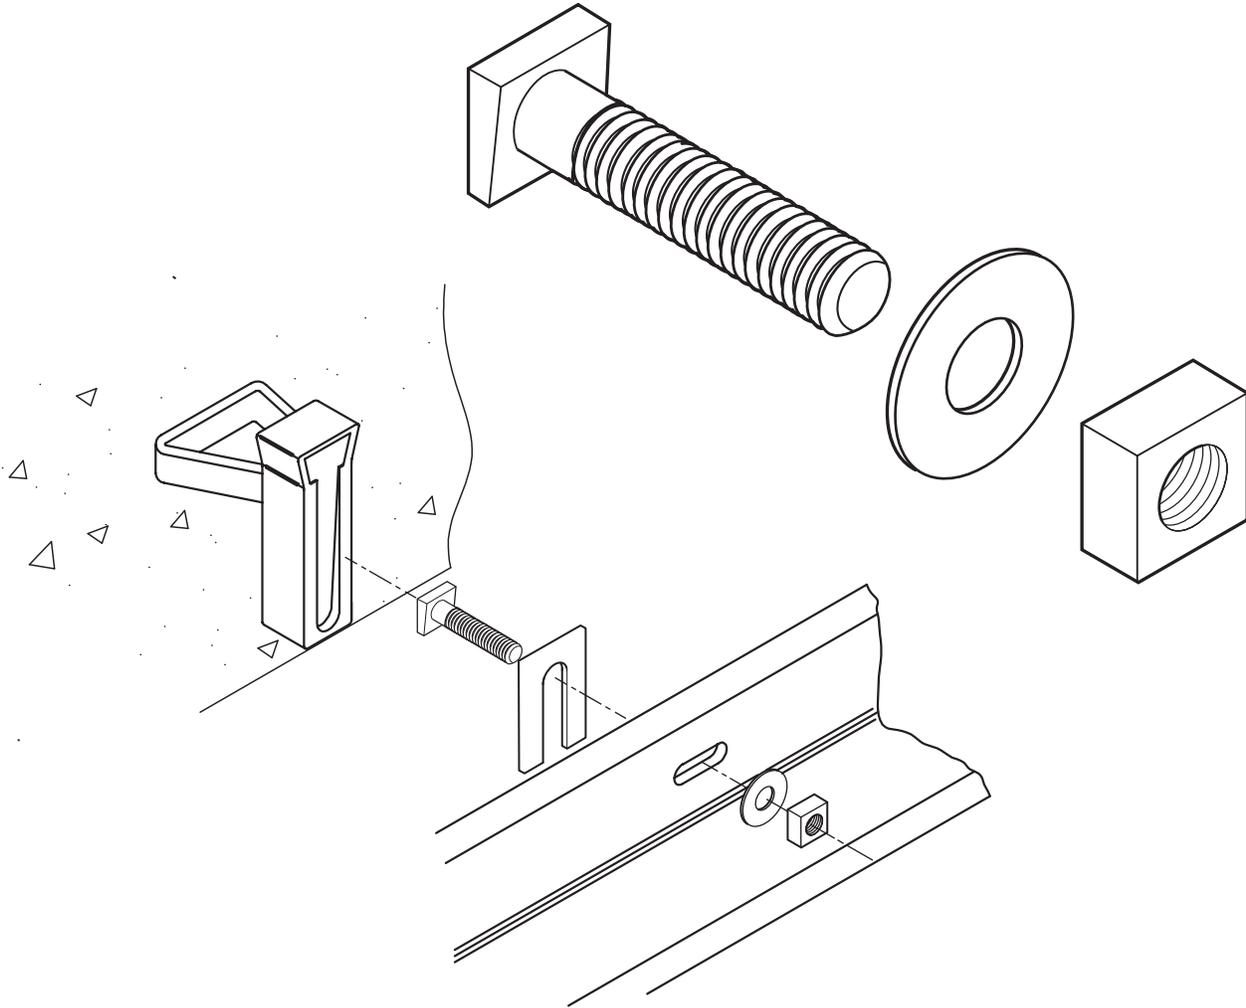

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

MATERIAL CONFORMANCE

Hot Dip Galvanized

ASTM A153/A153M, ASTM A123/A123M

Stainless Steel

Type 304: **ASTM A276, ASTM A582/A582M**

Type 316: **ASTM A240/A240M, ASTM A582/A582M**

PERFORMANCE DATA

Carbon Steel: 60,000 psi minimum tensile strength

Stainless Steel: 70,000 psi minimum tensile strength

Askew Head Bolt Finish:

Hot-Dip Galvanized | Stainless Steel Type 304 Type 316

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

Askew Head Bolt Diameter:

3/4"

Askew Head Bolt Length:

2" 2 1/2" 3" 4"

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS

T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations:

ALABAMA - ILLINOIS - MARYLAND

NEW YORK - PENNSYLVANIA - TEXAS

UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2014