


# Seismic Anchors and Ties

## CONTINUOUS WIRE

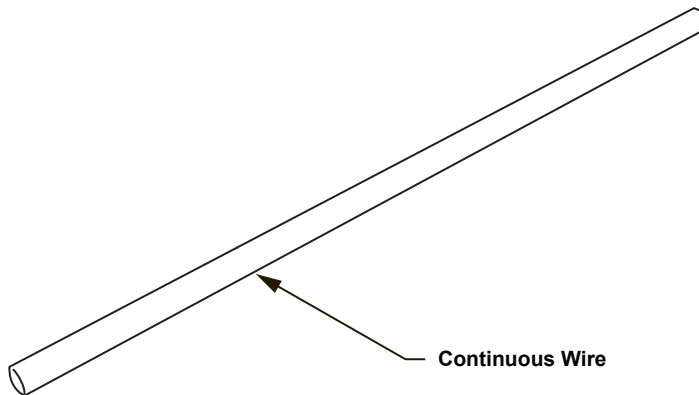

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

9 ga., 3/16"Ø or 1/4"Ø continuous wire for seismic applications

**MATERIAL CONFORMANCE**

**Wire (Carbon Steel):**

Cold-drawn steel wire conforming to **ASTM A1064/A1064M:**

Tensile Strength - 80,000 psi | Yield Point - 70,000 psi minimum

Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft<sup>2</sup>)

NOTE: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Wire (Stainless Steel):**

**ASTM A580/A580M** - AISI Type 304 or Type 316

**H&B manufactures steel wire products from a minimum of 95% recycled material.**

**Continuous Wire:**

Wire Size:  9 ga.  3/16"Ø  1/4"Ø

Finish:

Hot-Dip Galv.  Stainless Steel:  Type 304  Type 316

**H&B recommends Stainless Steel for maximum protection against corrosion**

**IMPORTANT:** Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.