





HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Glass Block Anchor & Reinforcement

Glass Block Panel Anchor

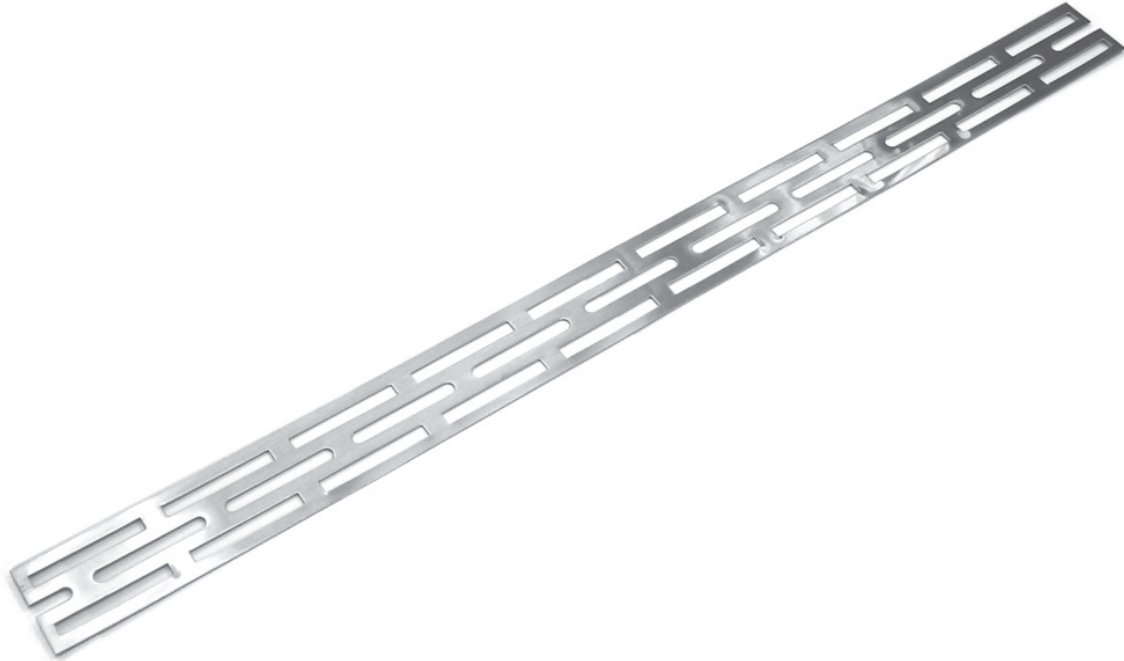

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

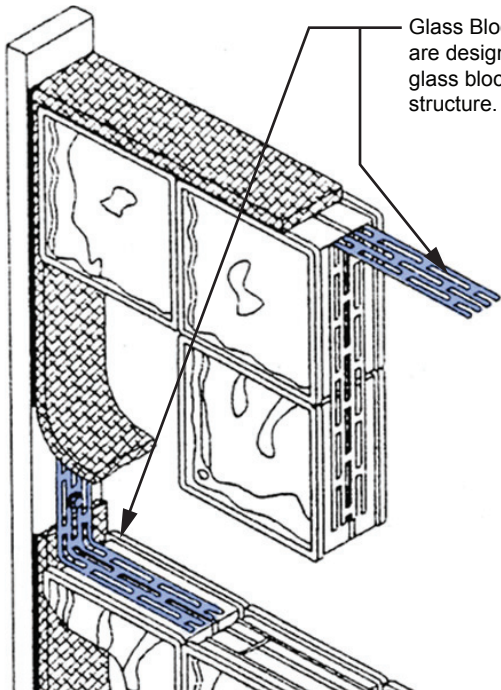

Glass Block Panel Anchors are designed to anchor glass block to the adjacent structure.

Thickness: 20 ga.

Width x Length: (standard) 1 3/4" x 24" 1 3/4" x 16"

Finish:

- Hot-Dip Galvanized
- Stainless Steel

Note: Hohmann & Barnard recommends **Stainless Steel** for maximum protection against corrosion.

MATERIAL CONFORMANCE

Sheet Metal (Carbon Steel): ASTM A1008/A1008M
Zinc Coating:
Hot-Dip Galvanized after fabrication: ASTM A153/A153M Class B
Note: Hohmann & Barnard will certify Hot-Dip Galvanized to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel):
ASTM A666, ASTM A480, ASTM A240/A240M, ASTM A167 - AISI Type 304

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
CANADA

© HOHMANN & BARNARD, INC. - 2012