


Flashing and Reglets Stretch-X-Seal™

Stretchable Flashing

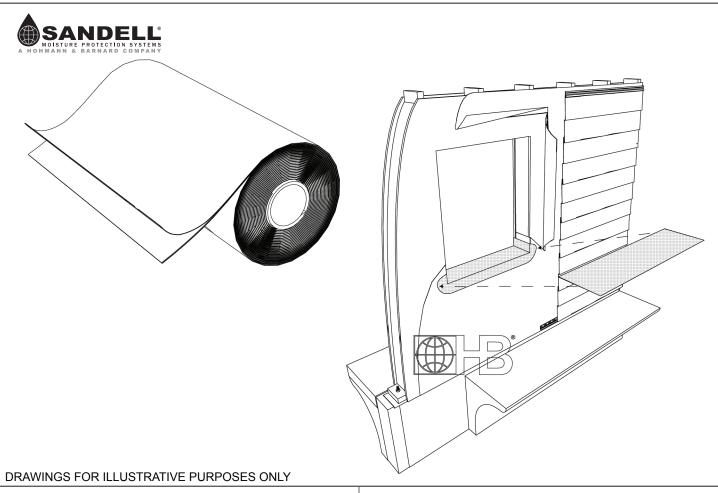

Stretch-X-Seal™

Flashing for Window Sills and Difficult Shapes

Stretch-X-Seal $^{\text{TM}}$ is a "stretchable" flashing tape made from an elastic non-woven polyolefin factory laminated to a proprietary adhesive.

- Adapts to difficult shapes: round top windows, window pans, and wall penetrations
- · Adhesive is backed with a removable release liner.
- Available in 7", 9" & 11" wide (Other widths available upon request)
- 75 ft. long
- · UV-resistant for 120 days
- · Tear resistant
- · Maintains performance in extreme temperatures

Patents Pending

Manufactured from 45% post-industrial and/or post-consumer recycled material.

* Please refer to Hohmann & Barnard installation instructions for more information.

Technical Data

- Tensile Strength ASTM D828
 Machine Direction 30 psi
 - Cross Direction 32 psi
- Trapezoid Tear ASTM D117
 Machine Direction 15 lbs
 Cross Direction 17 lbs
- Water Vapor Transmission ASTM E96A 28 perms
- Water Resistance ASTM D779

Pass

• Air Permeance - ASTM E2178-03

< 0.001 L/s/m²

Roll Width: (rolls are 75 ft. long)	
7"	9"
11"	OTHER

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788 CORPORATE HEADQUARTERS T: 800.645.0616 F: 631.234.0683

www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
CANADA

© HOHMANN & BARNARD, INC. - 2013