


Flashing and Reglets

Stretch-X-Seal™

Stretchable Flashing

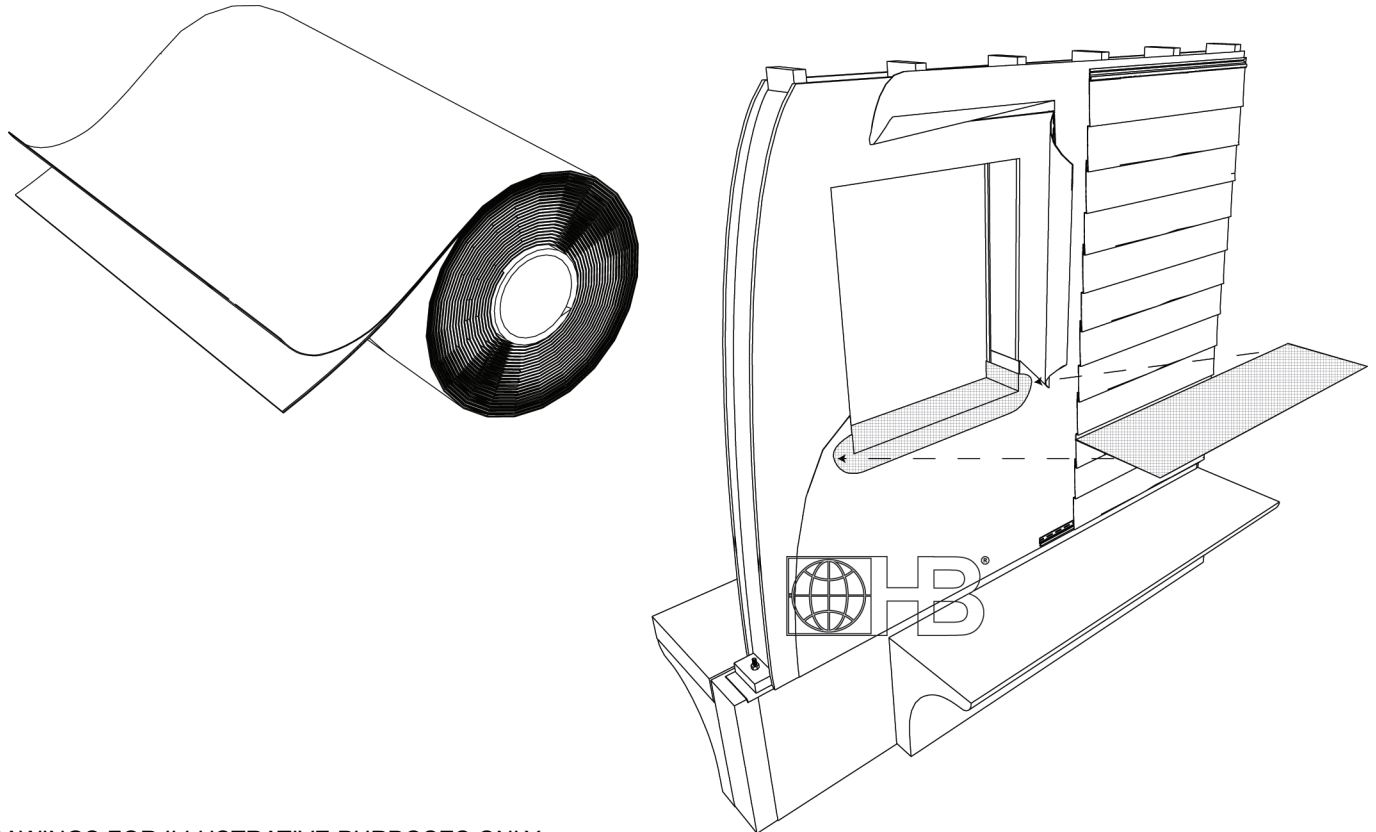

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Stretch-X-Seal™

Flashing for Window Sills and Difficult Shapes

Stretch-X-Seal™ is a "stretchable" flashing tape made from an elastic non-woven polyolefin factory laminated to a proprietary adhesive.

- Adapts to difficult shapes: round top windows, window pans, and wall penetrations
- Adhesive is backed with a removable release liner.
- Available in 3", 4", 5", 6", 7", 9", and 12" wide (Other widths available upon request)
- 75 ft. long
- UV-resistant for 120 days
- Tear resistant
- Maintains performance in extreme temperatures

Patents Pending

Manufactured from 45% post-industrial and/or post-consumer recycled material.

*** Please refer to Hohmann & Barnard installation instructions for more information.**

Technical Data

- Tensile Strength - **ASTM D828**
 - Machine Direction 30 psi
 - Cross Direction 32 psi
- Trapezoid Tear - **ASTM D117**
 - Machine Direction 15 lbs
 - Cross Direction 17 lbs
- Water Vapor Transmission - **ASTM E96A**
28 perms
- Water Resistance - **ASTM D779** Pass
- Air Permeance - **ASTM E2178-03** < 0.001 L/s/m²

Roll Width: (rolls are 75 ft. long)

- 3"
 4"
 5"
 6"
 7"
 9"
 12"
- OTHER _____

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.