


HOHMANN & BARNARD, INC.
a MiTek company

Adjustable Anchor System for Rubble Stone Tie-2R Anchor System

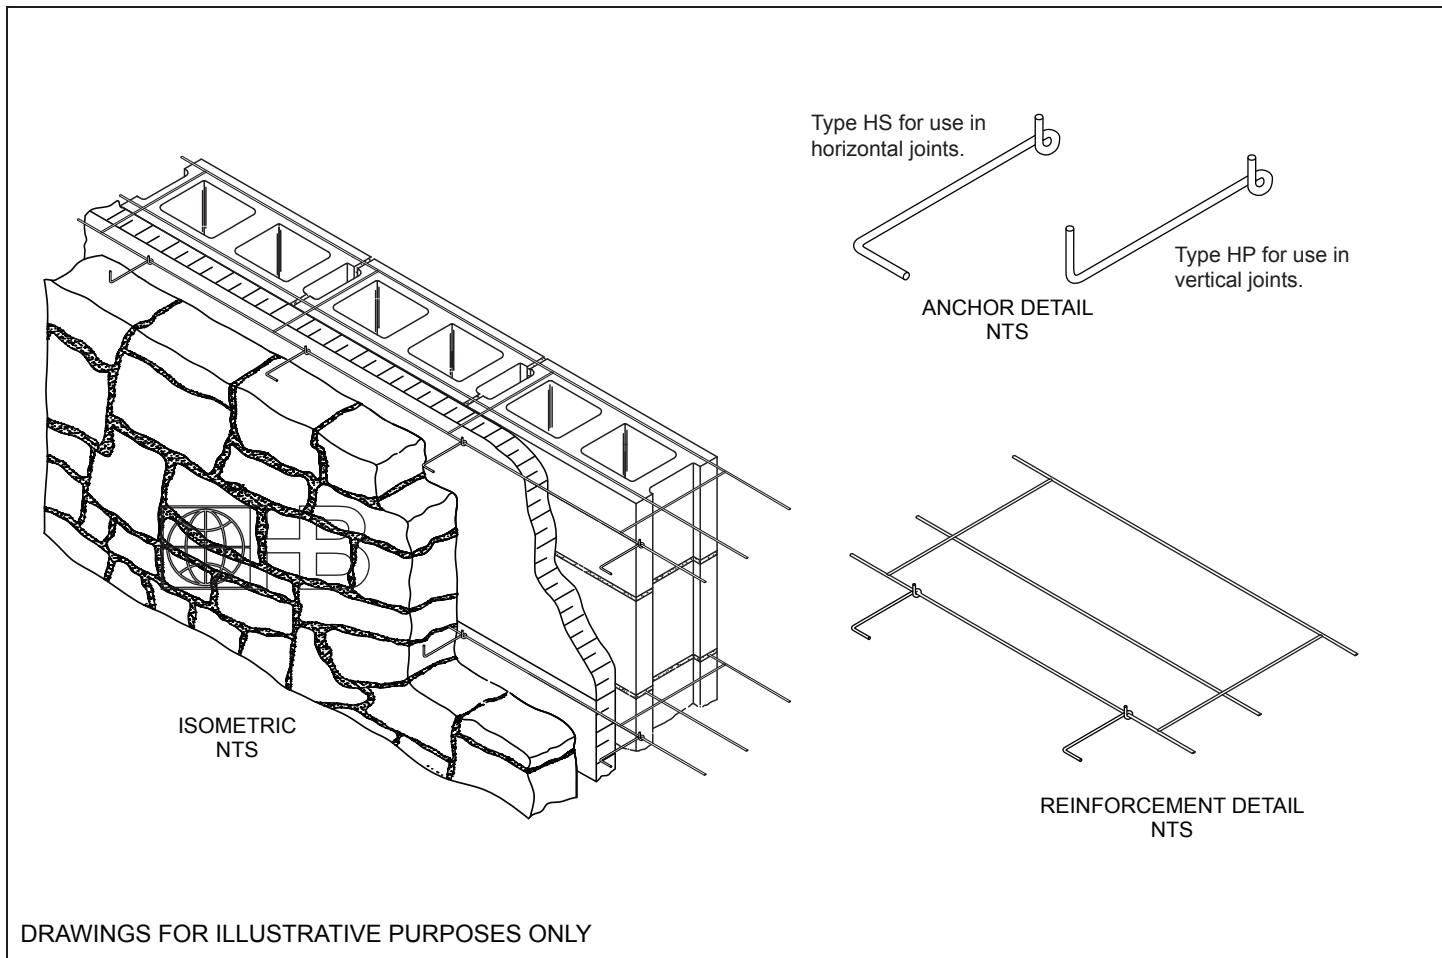

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

MATERIAL CONFORMANCES - JOINT REINFORCEMENT

Hohmann & Barnard joint reinforcement products conform to Standard Specification **ASTM A951/A951M & ACI/ASCE 530** (Building Code Requirements for Masonry Structures)

WIRE:

(Stainless Steel): **ASTM A580/A580M - AISI Type 304** or **316**
 (Carbon Steel): Prefabricated construction from cold-drawn steel wire conforming to ASTM A1064/A1064M:
 Tensile Strength - 80,000 p.s.i., Yield Point - 70,000 p.s.i. minimum
 Zinc Coating:
 Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft²)
 Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²
 (Hot-Dip Galvanized available special order only)

WIRE DIAMETER:

- Standard 9 gauge (.148" or W1.7) deformed Side Rods, 3/16"Ø (.187" or W2.8) Cross Rods (16" O.C.) and 1/4"Ø Outer Rod.
- HP & HS Helical Hooks are 3/16"Ø. State length when ordering.

H&B manufactures steel wire products from a minimum of 95% post-consumer recycled material.

FINISHES:

- Hot-Dip Galvanized (special order only)
- Stainless Steel - Type 304 Stainless Steel - Type 316

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

Helical Hooks:

- HP, length: _____ HS, length: _____

Note: State cavity and/or insulation thickness when ordering.

BLOCK SIZE:

- 4" 6" 8"
- 10" 12" 14"
- 16"

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2017 MiTek®