


HOHMANN & BARNARD, INC.
a MiTek company

Adjustable Anchor System for Rubble Stone Tie-HVR-195VB Anchor System

CLIP-STYLE (for INSULATED CAVITY WALL w/METAL STUD or CONCRETE BACKUP)

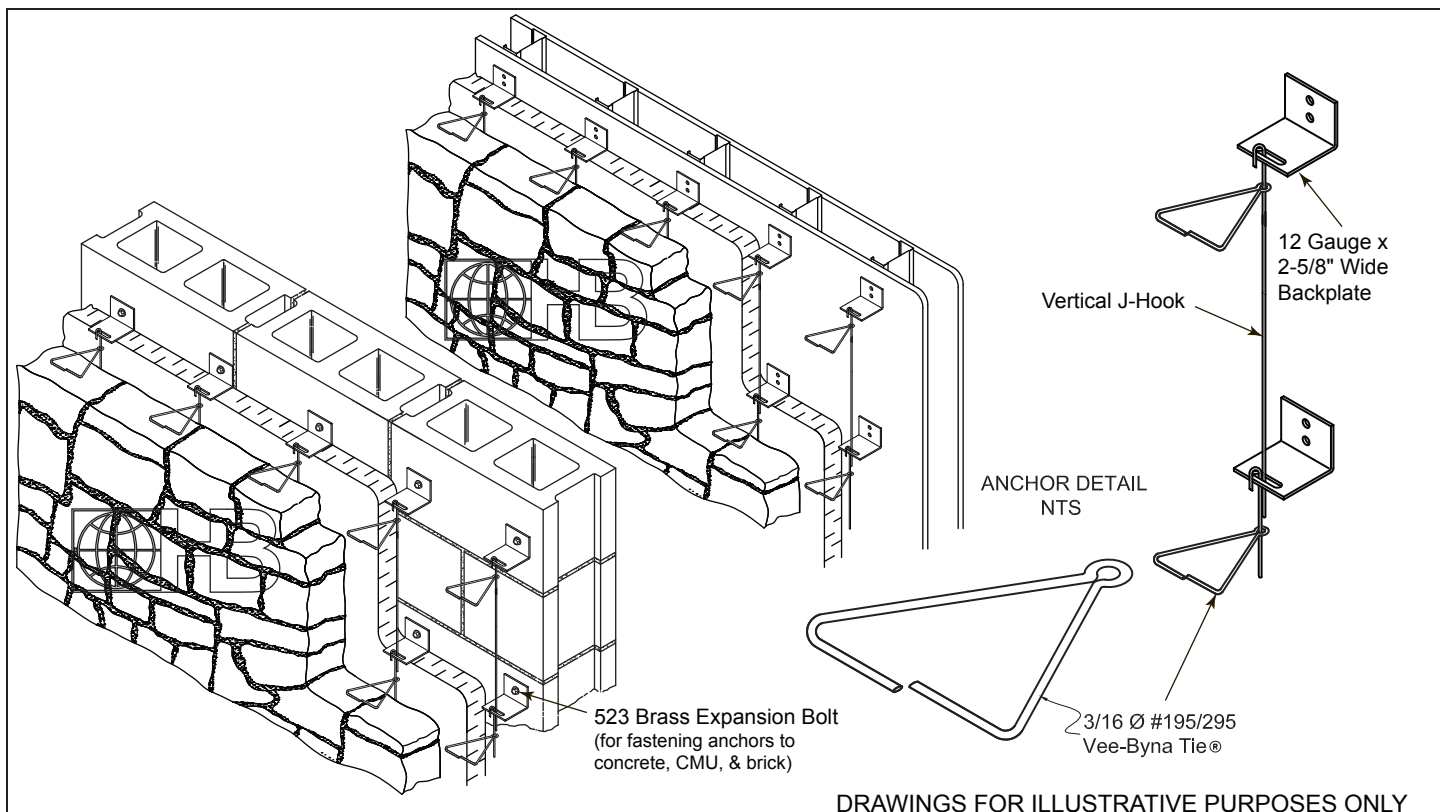

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Material Conformances

Sheet Metal:

(Carbon Steel): **ASTM A1008/A1008M**
Zinc Coating: **ASTM A153/A153M-B2 Class B** (sheet metal ties and anchors hot-dip galvanized after fabrication).
(Hot-Dip Galvanized available special order only)
(Stainless Steel): **ASTM A666, ASTM A480, ASTM A240/A240M, and ASTM A167 - AISI Type 304 or 316**

Wire:

(Carbon Steel): Prefabricated construction from cold-drawn steel wire conforming to **ASTM A1064/A1064M**
Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum
Zinc Coating:
Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2 (1.5 oz/ft²)**
(Hot-Dip Galvanized available special order only)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²
(Stainless Steel): **ASTM A580/A580M - AISI Type 304 or 316**

VERTICAL J-HOOK:

(Carbon Steel): **ASTM A36/A36M**
(Hot-Dip Galvanized **ASTM A153/A153M Class B** - special order only)

VERTICAL J-HOOK (Stainless Steel):
ASTM A276 - AISI Type 304 or 316

U.S. Patent No. 8,904,725

H&B manufactures steel wire products from a minimum of 95% post-consumer recycled material.

Backplate: 12 gauge x 2-5/8" wide
For Insulation Thickness:

- | | |
|---------------------------------|--|
| <input type="checkbox"/> 0" | <input type="checkbox"/> 2 1/2" |
| <input type="checkbox"/> 1" | <input type="checkbox"/> 3" |
| <input type="checkbox"/> 1 1/2" | <input type="checkbox"/> 3 1/2" |
| <input type="checkbox"/> 2" | <input type="checkbox"/> Custom: _____ |

Backplate Finish:

- Hot-Dip Galvanized*
 Stainless Steel - Type 304
 Stainless Steel - Type 316

523 Brass Expansion Bolt:

- For fastening anchors to concrete, CMU, & brick

Masonry Tie:

- | | |
|-----------------------------|--|
| <input type="checkbox"/> 3" | <input type="checkbox"/> 5" |
| <input type="checkbox"/> 4" | <input type="checkbox"/> Custom: _____ |

Masonry Tie Finish:

- Hot-Dip Galvanized*
 Stainless Steel - Type 304
 Stainless Steel - Type 316

Vertical J-Hook:

- | | |
|--------------------------------|---------------------------------|
| <input type="checkbox"/> 3/8"Ø | <input type="checkbox"/> 7/16"Ø |
| <input type="checkbox"/> 1/2"Ø | |

J-Hook Finish:

- Hot-Dip Galvanized*
 Stainless Steel - Type 304
 Stainless Steel - Type 316

* Hot-Dip Galvanized available special order only

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2017 MiTek®