




HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Repair and Restoration Anchors

Spira-Lok®

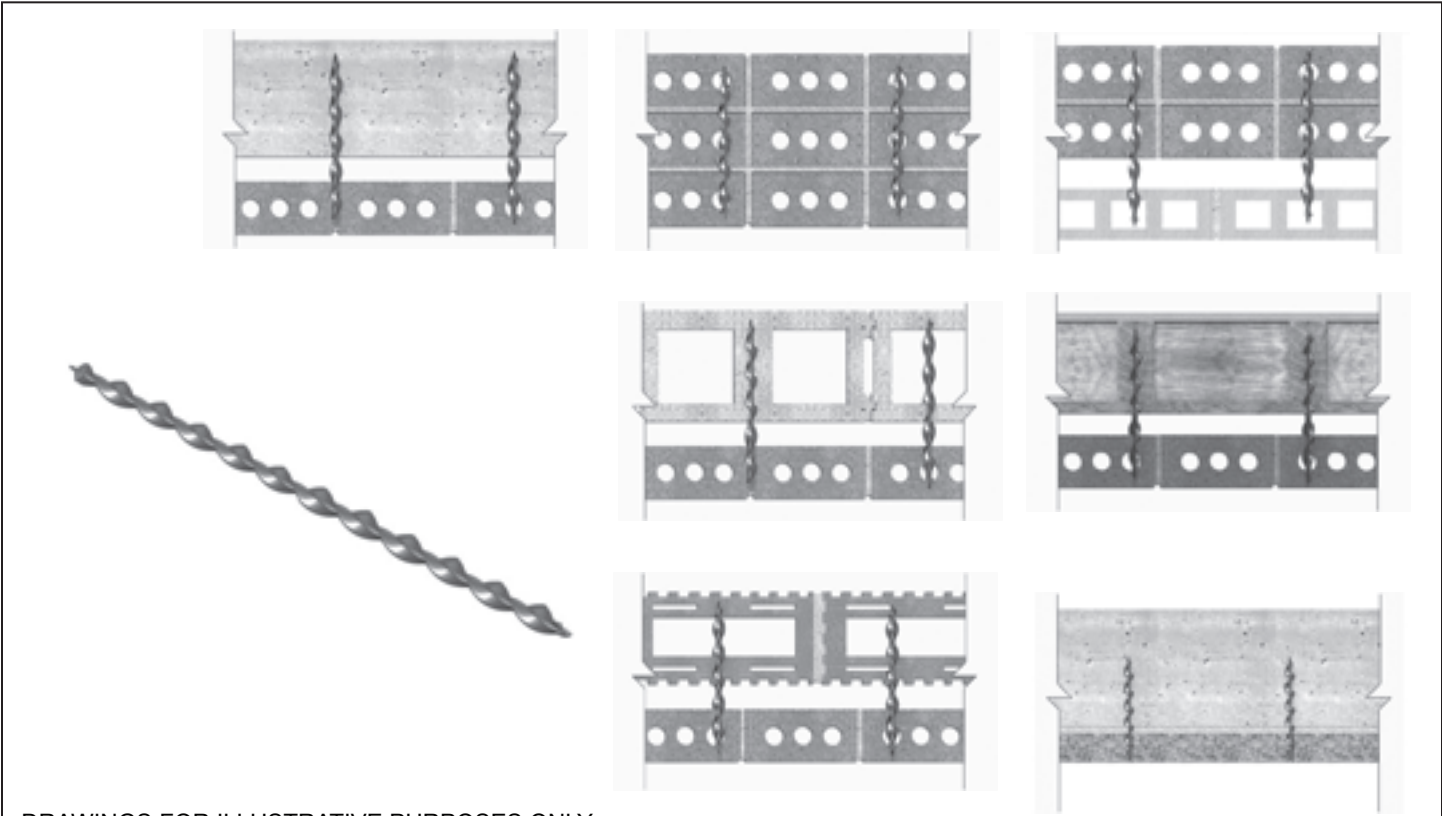

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Spira-Lok®

A one-piece, flexible stainless steel wall tie for pinning masonry to new or existing walls. Also suitable for temporary support for lintel and shelf angle replacement. The dry-set technique may involve various tie diameters, drill bits and installation tools.

An on-site survey should be carried out prior to project tendering to determine material strength, tie diameter & length, pilot hole size and appropriate drilling technique.

See Blok-Lok web site for Spira-Lok Installation Video.

Finish:

- Stainless Steel Type 304
- Stainless Steel Type 316 (special order)

Diameter:

- 8 mm (0.315")
- 10 mm (0.394")

Length (6.1" - 24" lengths available):

- | | |
|---|---|
| <input type="checkbox"/> 155 mm (6.1") | <input type="checkbox"/> 330 mm (13.2") |
| <input type="checkbox"/> 170 mm (6.7") | <input type="checkbox"/> 350 mm (14.0") |
| <input type="checkbox"/> 195 mm (7.7") | <input type="checkbox"/> 400 mm (16.0") |
| <input type="checkbox"/> 220 mm (8.7") | <input type="checkbox"/> 450 mm (18.0") |
| <input type="checkbox"/> 245 mm (9.8") | <input type="checkbox"/> 525 mm (21.0") |
| <input type="checkbox"/> 270 mm (10.8") | <input type="checkbox"/> 600 mm (24.0") |
| <input type="checkbox"/> 295 mm (11.8") | |

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2013