




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

## Repair and Restoration Anchors

# Torq-Lok® 530 Series Anchor

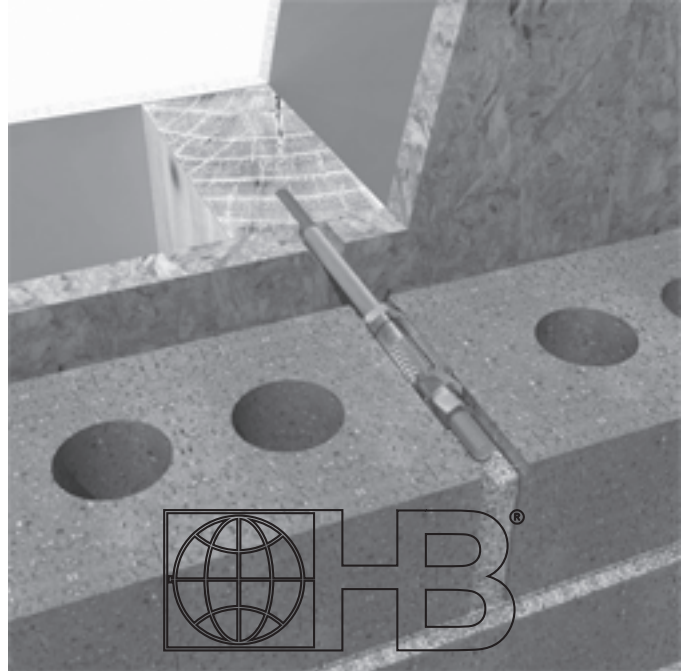

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### Torq-Lok - 530 Series

The 530 Series Anchor, for stud backup, features 360 Brass Expanders with a Type 304 Stainless Steel shaft and 300 Stainless Steel hardware.

### Technical Data:

Typical Torq-Lok® Shaft Properties  
*Ultimate Shaft Buckling Strength*

Shaft Length (in.)	5 ½"	6 ½"	9 ½"	11 ½"
Capacity (lb.)	1620	1425	1100	725

Hole in veneer = 9/16"

Hole in backup:

Metal Stud = 3/16"

Wood Stud = 3/16", hole is optional if stud is 2x4

Installation Torque:

Veneer = 50 - 100 in. lbs.

16 gauge = 30 - 60 in. lbs.

18 gauge = 20 - 40 in. lbs.

Wood Stud = 30 - 50 in. lbs.

Based on a typical 3 5/8" veneer.

### Shaft Length:

- 5 ½"
- 6 ½"
- 9 ½"
- 11 ½"

The 530 Series Anchor can be used with: wood, metal stud or steel.

**HOHMANN & BARNARD, Inc.**  
30 Rasons Court | Hauppauge, NY 11788  
CORPORATE HEADQUARTERS  
T: 800.645.0616 F: 631.234.0683  
[www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS - MARYLAND  
NEW YORK - PENNSYLVANIA - TEXAS  
CANADA

© HOHMANN & BARNARD, INC. - 2012