


HOHMANN & BARNARD, INC.
a MiTek company

Seismic Anchors and Ties

Seismicclip® Interlock System

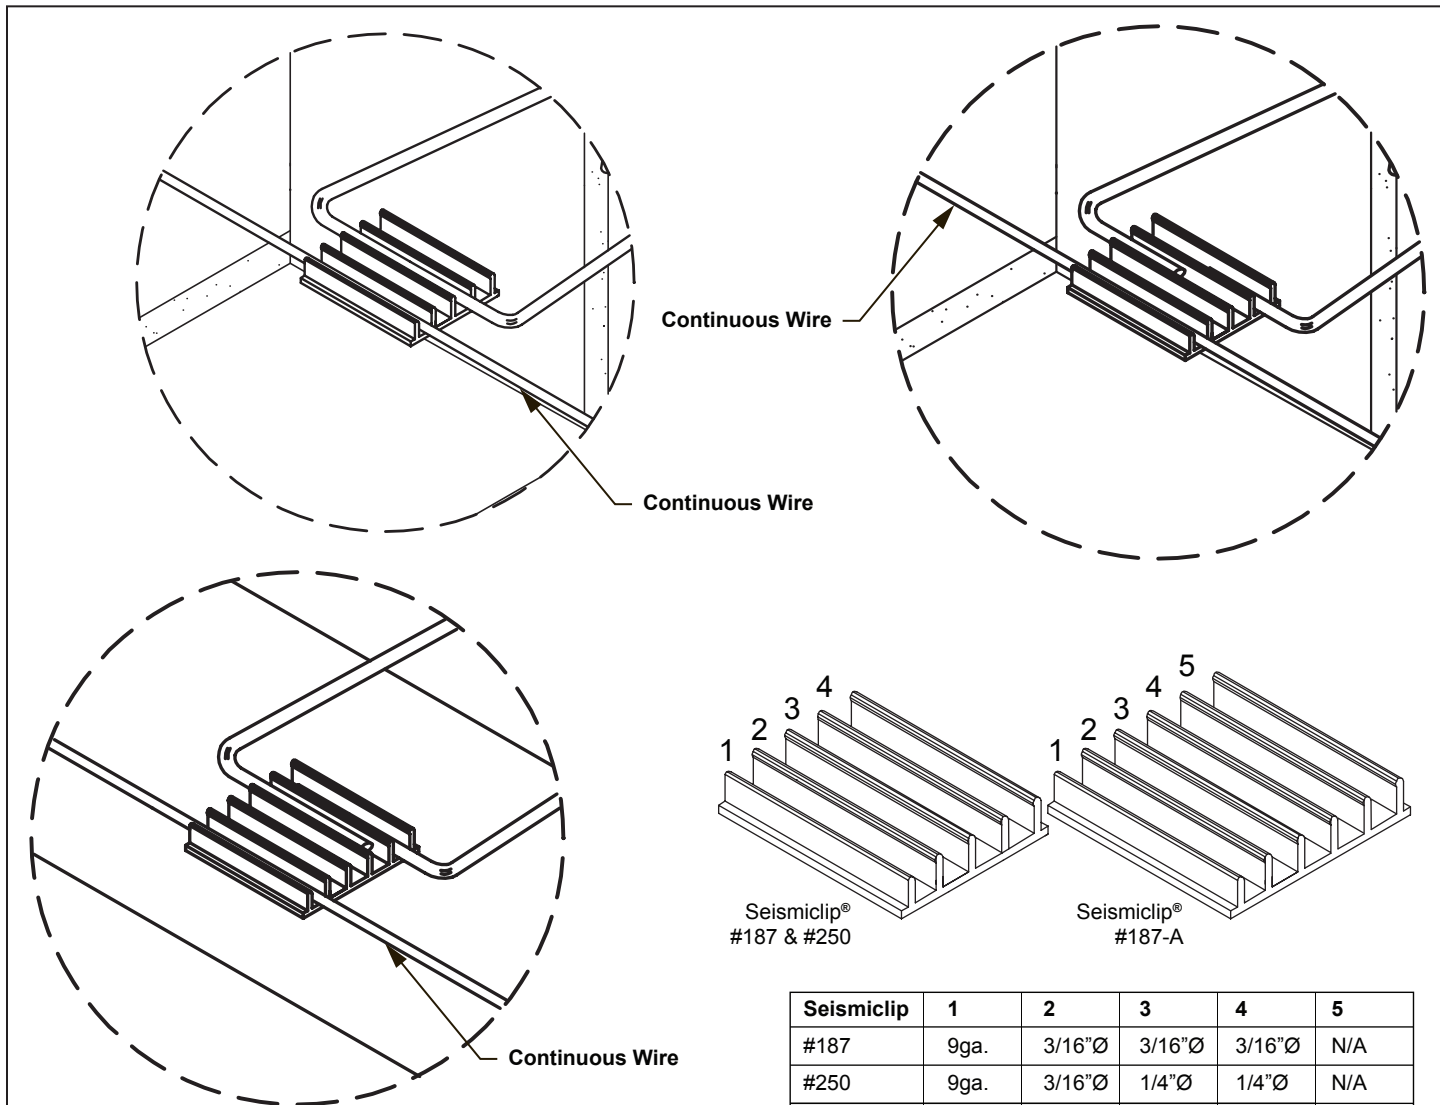

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Seismicclip	1	2	3	4	5
#187	9ga.	3/16"Ø	3/16"Ø	3/16"Ø	N/A
#250	9ga.	3/16"Ø	1/4"Ø	1/4"Ø	N/A
#187-A	9ga.	3/16"Ø	3/16"Ø	3/16"Ø	3/16"Ø

Seismicclip® Interlock System

The Seismicclip® features retaining ridges that will accept standard H&B Wire Ties and Continuous Wire. Horizontal Joint Reinforcement Wire and Masonry Tie are snapped into the Seismicclip® and fully surrounded by mortar. This allows all components to function integrally as a single unit.

Material:

Seismicclip® is an extrusion of durable, impact-resistant, rigid polyvinyl chloride tested in conformance with: ASTM D1781 (Cell Classification), ASTM D2240 (Hardness Shore D), ASTM D638 (Tensile Yield & Modulus), ASTM D790 (Flexural Strength & Modulus)

Can. Pat. No. 1,313,887

U.S. Pat. No. 4,875,319

Model:

- Seismicclip #187 - for use with 3/16"Ø Vee Byna-Tie®
 - Seismicclip #250 - for use with 1/4"Ø Vee Byna-Tie®
 - Seismicclip #187-A - use with 3/16"Ø 180/280 Dub'l Loop-Lok®
- (All models can be used with either 9 ga. or 3/16" dia. continuous wire)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.
CORPORATE HEADQUARTERS
30 Rasons Court | Hauppauge, NY 11788
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2016