




Ties & Anchors - Miscellaneous

344 - Rigid Partition Anchor

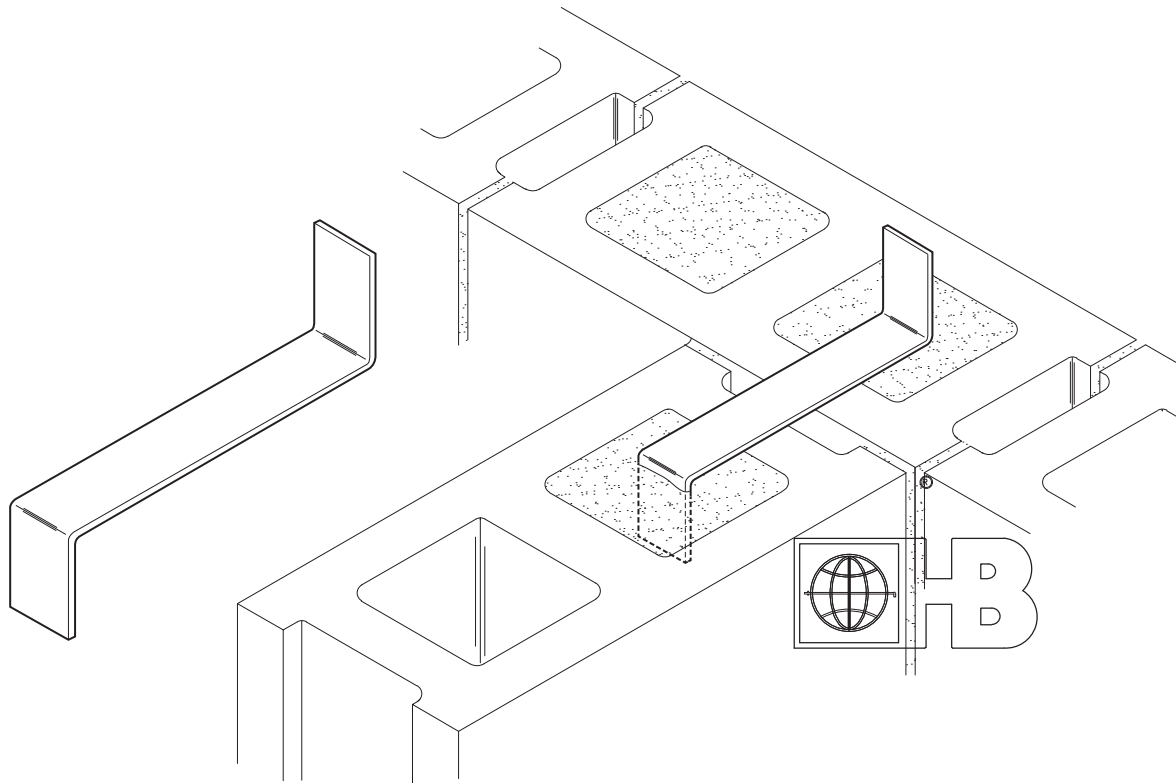

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

344 Rigid Partition Anchor for anchoring load bearing walls at intersections.

MATERIAL CONFORMANCE

Sheet Metal (Carbon Steel):

ASTM A1008/A1008M, ASTM A36/A36M (3/16" thick or greater)

Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M** Class B

Note: Hohmann & Barnard will certify Hot-Dip Galvanized to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel):

ASTM A666, ASTM A480/480M, and ASTM A240/A240M

AISI Type 304 or 316

Dimensions:

Made to order from 1 1/4" or 1 1/2" wide x 1/8" or 1/4" thick bar stock x any length (state when ordering).

Standard lengths are 24" and bends are 2".

Heavy duty carbon steel plate manufactured from 99% recycled material. Stainless Steel manufactured from an average of 60% recycled material.

Finishes:

Plain Steel

Hot-Dip Galv. | Stainless Steel: Type 304 Type 316

Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.

Thickness:

1/8"

1/4"

3/16"

Other _____

Width:

1"

1 1/2"

1 1/4"

2"

Length:

24" (standard)

Other _____

NOTE: Some configurations are non-stock, contact your local sales manager for price, availability and lead times.

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, INC.
CORPORATE HEADQUARTERS
30 Rasons Ct.
Hauppauge, NY 11788
T: 800-645-0616 | www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
UTAH - CANADA

© 2013-2021