


HOHMANN & BARNARD, INC.
a MiTek company

Gripstay™ Anchors, Channels & Ties

362-CX Gripstay™ Channels

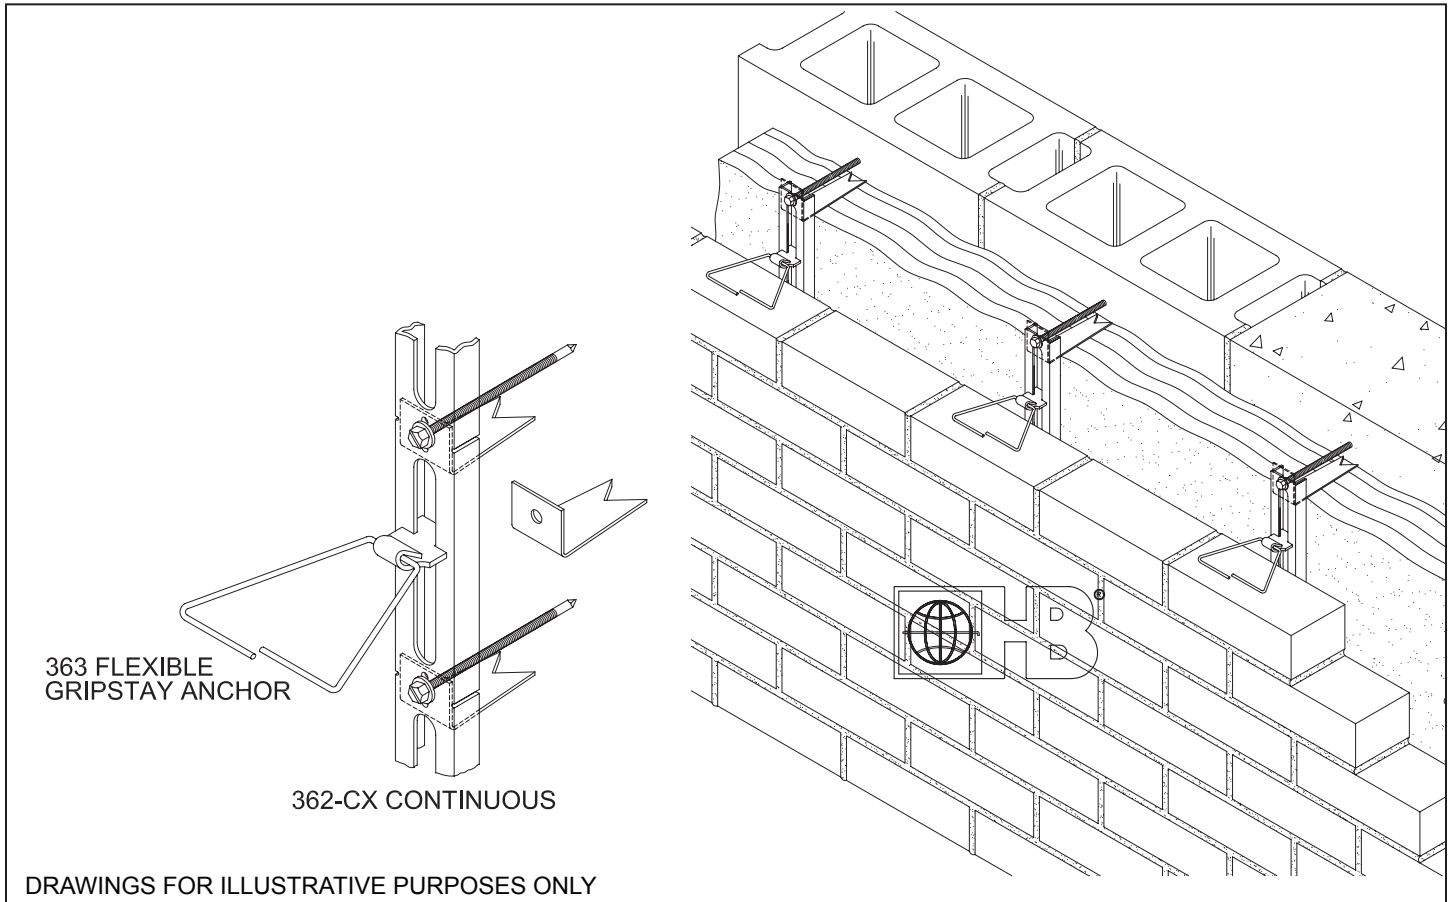

363 FLEXIBLE
GRIPSTAY ANCHOR

362-CX CONTINUOUS

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

362-CX is a Continuous Gripstay™ Channel for use on backup block, it accepts any Gripstay™ Anchor for masonry or stone.

MATERIAL CONFORMANCE

Sheet Metal (Carbon Steel):

ASTM A1008/A1008M

Zinc Coating:

Hot-Dip Galvanized: **ASTM A153/A153M Class B** (1.5 oz/ft²) (sheet metal ties and anchors galvanized after fabrication)

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel):

ASTM A666, ASTM A480/ASTM A480M, and ASTM A240/A240M - AISI Type 304 or Type 316

Standard Dimensions:

- Thickness: 14 gauge, 12 gauge, or 11 gauge
- Length: 5'-0" long, other lengths available in 7 1/2" increments
- Hole size: 5/16"
- Made to order with welded legs to accommodate any thickness insulation/wallboard.

U.S. Patent No. 5,063,722

Finishes:

Hot-Dip Galv. | Stainless Steel: Type 304 Type 316

Note: Hohmann & Barnard recommends Stainless Steel for maximum protection against corrosion.

Thickness:

14 gauge 12 gauge 11 gauge

Note: Lok-Channel Clips allow the 362-C to be attached to masonry using H&B expansion bolts (as shown)

Length:

Standard 5'-0" Other _____
(7 1/2" increments, e.g., 15", 22 1/2", 30" etc.)

Leg Length: _____ (State any required length. **Note:** channel depth of 5/8" is not to be included in leg length)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.
CORPORATE HEADQUARTERS
30 Rasons Court | Hauppauge, NY 11788
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2017 MiTek®