


HOHMANN & BARNARD, INC.
a MiTek company

Veneer Anchors X-Seal™ Anchor

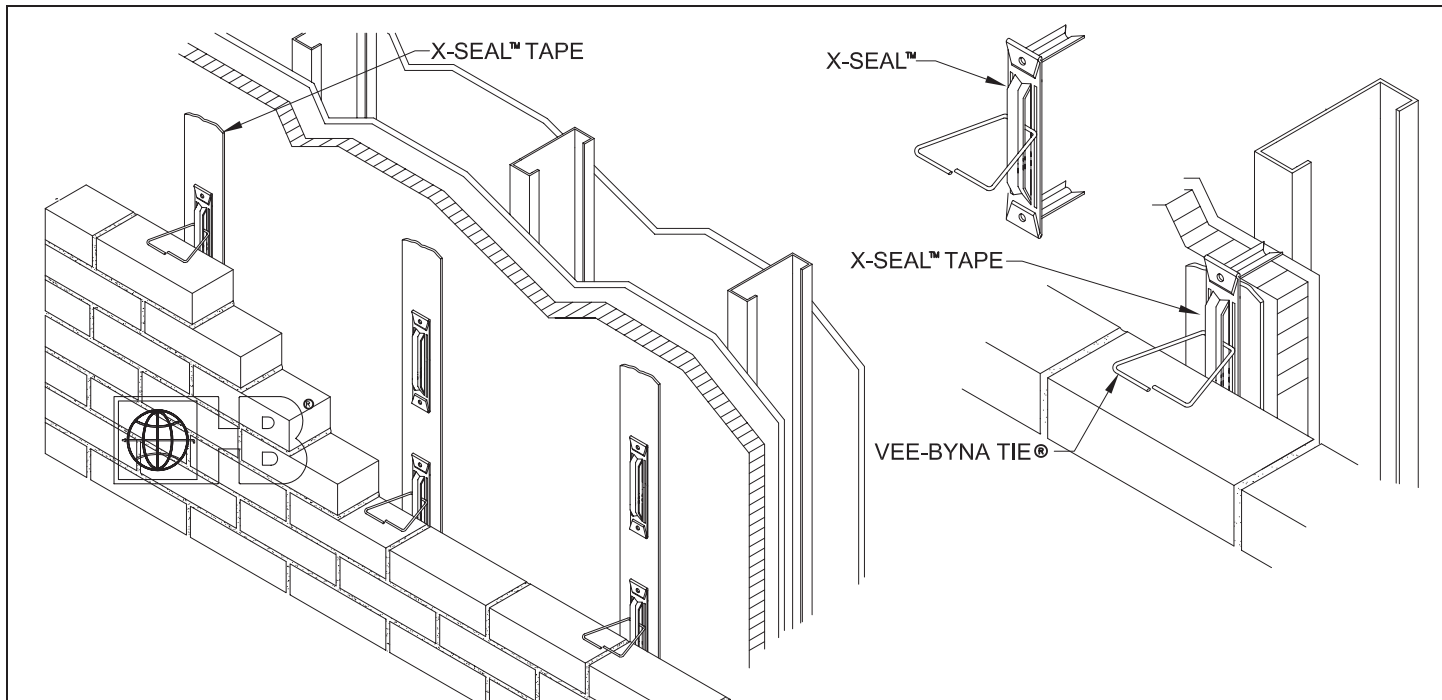

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

H&B RECOMMENDS 16" X 16" SPACING

Description:

The X-Seal™ Anchor is a veneer wall anchor that allows the backplate to seal sheathing from air and moisture infiltration while maintaining integrity of the vapor barrier.

MATERIAL CONFORMANCE

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M**
Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum
Zinc Coating:
Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B** (1.5 oz/ft²)

Wire (Stainless Steel): **ASTM A580/A580M** - AISI Type 304 or Type 316

Sheet Metal (Carbon Steel): **ASTM A1008/A1008M**
Zinc Coating:
Hot-Dip Galvanized: **ASTM A153/A153M Class B2** (1.5 oz/ft²)
(sheet metal ties and anchors galvanized after fabrication)

Sheet Metal (Stainless Steel):
ASTM A 666, ASTM A480/480M, and ASTM A240/A240M
AISI Type 304 or 316

X-Seal™ Tape:
ASTM D751-95, ASTM D4533-91, ASTM G154-98, ASTM E96-B

X-Seal™ Anchor:
U.S. Patents 6,925,768, 6,941,717, 7,562,506, 7,587,874, 7,845,137
Canadian Patent 2,458,008

Finish:

- Hot-Dip Galvanized
- Stainless Steel - Type 304 (Type 316 available on special order)

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

Leg Depth (Equal to thickness of wallboard + insulation):

- | | | |
|--|--|--|
| <input type="checkbox"/> X-Seal (1/2") | <input type="checkbox"/> X-Seal (3/4") | <input type="checkbox"/> X-Seal (1") |
| <input type="checkbox"/> X-Seal (1 1/2") | <input type="checkbox"/> X-Seal (2") | <input type="checkbox"/> X-Seal (2 1/2") |
| <input type="checkbox"/> X-Seal (2 5/8") | <input type="checkbox"/> X-Seal (3") | <input type="checkbox"/> X-Seal (3 1/2") |
| <input type="checkbox"/> X-Seal (4") | | <input type="checkbox"/> Other _____ |

Thickness: 14 Gauge

Vee-Byna Tie® Diameter:

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

Vee-Byna Tie® Length:

- 3" 3 1/2" 4" 4 1/2"
- 5" Other _____

X-Seal® Tape: Adhesive backed 3" x 75 ft. rolls
(Seals the shaft of the screws & legs of X-Seal™ Anchors at penetration)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, Inc.
CORPORATE HEADQUARTERS
30 Rasons Court | Hauppauge, NY 11788
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2018 MiTek®