




HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Flashing and Reglets

X-BARRIER™ Peel & Stick Barrier

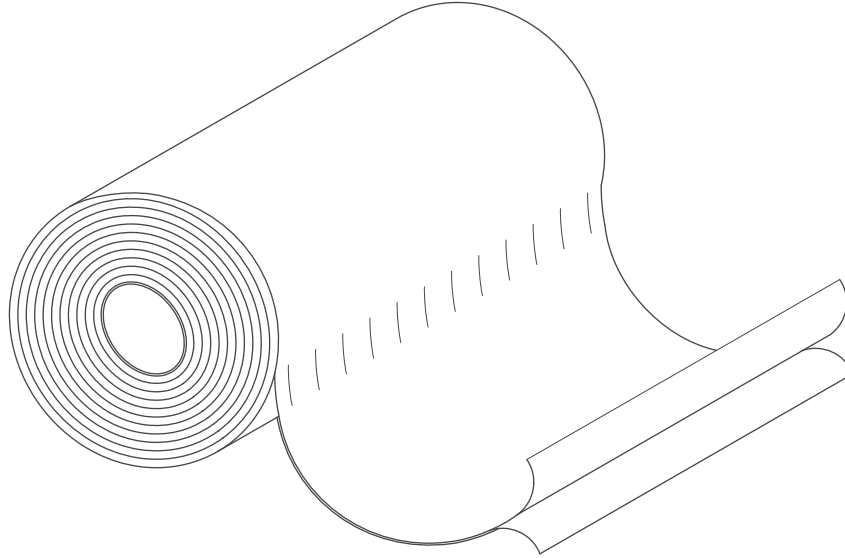

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

X-Barrier™ is a sheet applied self-adhesive, membrane to provide an air and water barrier when applied to above grade wall assemblies. X-Barrier is a self-adhered membrane that resists air leakage and water penetration and acts as a vapor barrier.

- Color: White sheet
- Adhesive: High temperature non-asphalt
- Thickness: 40 mils
- UV Exposure: up to 120 days
- Application Temperature: Above 40°F to 120°F
- Adhesive-backed with removable release liner

Patents Pending

Storage and Protection:

X-Barrier™ should be stored under cover in original sealed containers above 40°F and below 100°F. ALWAYS keep X-Barrier from getting wet. The shelf life for unopened packaging is 1 year.

*** Please refer to Hohmann & Barnard installation instructions for more information.**

Technical Data:

- Tensile Strength - **ASTM D751**
 - Machine Direction (Force) 130 lbs
 - Cross Direction (Force) 124 lbs
- Trapezoidal Tear Strength - **ASTM D4533**
 - Machine Direction (Force) 46 lbs
 - Cross Direction (Force) 44 lbs
- Mullen Burst - **ASTM D751** 180 psi
- UV Exposure (2000 hours) - **ASTM G154-98** >90%
- Permeability **ASTM E2178** 0.00035 cfm/ft²
ASTM E96 0.012 perms
- Air Leakage **ASTM E2357** 0.0008 cfm/ft² (75Pa)

DIMENSIONS: 36" wide x 75' long

¹Grains/h/ft²/in Hg (perms)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
UTAH - CANADA

© HOHMANN & BARNARD, INC. - 2015